

AOV Pressure Sensors




Features

- **Accuracy: 0.25% of Full Scale**
- **Wide range available**
- **Robust integrated connector**
- **Connects to QUIKLOOK cable sets or directly to the QUIKLOOK System**
- **TEDS Sensor Recognition (QUIKLOOK 3-FS ONLY)**

Teledyne LeCroy Test Services (TLTS) offers a full line of pressure sensors for use with the QUIKLOOK Test Systems. These ruggedized highly accurate sensors are used to capture test pressures such as diaphragm, line and supply pressure as well as I/P output pressure and are available in a variety of ranges. All AOV Pressure sensors include a QUIKLOOK adapter cable.

Teledyne AOV Pressure Sensors are available in the following ranges:

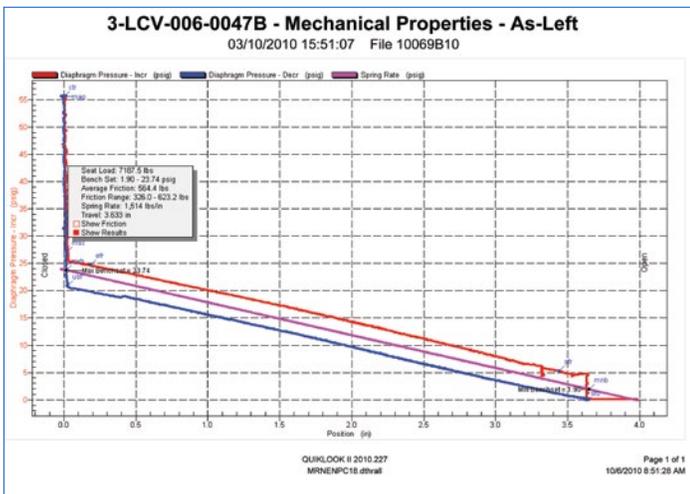

P/N	System	PSIG Range*
159145-30	QL2	0-30
160534-30	QL3-FS	
159145-50	QL2	0-50
160534-50	QL3-FS	
159145-100	QL2	0-100
160534-100	QL3-FS	
159145-150	QL2	0-150
160534-150	QL3-FS	
159145-200	QL2	0-200
160534-200	QL3-FS	
159145-500	QL2	0-500
160534-500	QL3-FS	
159145-1000	QL2	0-1000
160534-1000	QL3-FS	

•Other ranges available upon request